

C-2044

# Fulflo® Poly-Mate™ Plus Cartridges

## High Surface Area and High Efficiency All-Polypropylene Pleated Cartridges

Fulflo® Poly-Mate™ Plus Cartridges, made of pleated polypropylene micro-fiber, provide high efficiency and high purity filtration. The high efficiency of the Poly-Mate™ Plus line makes it an ideal membrane prefilter or cost-effective alternative to membrane cartridges in a wide range of applications.

Poly-Mate Plus™ Pleated Cartridges are available in the following pore sizes (nominal rating at 90%): 0.25µm, 0.45µm, 0.8µm, 2.0µm, 3.0µm, 5.0µm, 30.0µm, 50.0µm, 100.0µm

## Benefits

- All-polypropylene media and construction meet a broad range of performance requirements
- One-piece integral construction is 100% bonded for maximum cartridge integrity
- High surface area design provides superior flow rates and extended service life
- All materials of construction are FDA listed as acceptable for potable and edible liquid contact according to CFR Title 21



- Fixed pore construction provides ultimate particle retention
- Major end seal options are available to fit most standard vessels
- Poly-Mate™ Plus cartridges are non-fiber releasing and ensure consistent quality filtration performance

## Applications

- DI Water
- Process Water
- Magnetic Media
- Plating Chemicals
- Membrane Prefilter



ENGINEERING YOUR SUCCESS.

# Fulflo® Poly-Mate™ Plus Cartridges

## Specifications

### Materials of Construction:

Filter Media:  
Melt blown polypropylene microfiber  
Media Support Layers:  
Non-woven or mesh polypropylene  
Core:  
Heavy wall high strength polypropylene  
Media Support Cage and Thermally  
Welded End Caps: Molded polypropylene  
Seal Materials:  
Buna-N, EPR, Silicone, Viton\*, PFA  
Encapsulated Viton\*

### Dimensions:

Cartridge Outside Diameter: 2-11/16 in  
Cartridge Inside Diameter:  
DOE: 1-1/16 in, SOE: 1-5/32 in

### Maximum Recommended Operating Conditions:

Temperature: 200°F (93°C)  
Temperature @ 35 psid: 160°F (71°C)  
Change Out ΔP: 35 psi (2.4 bar)  
ΔP @ Ambient 70°F (21°C):  
70 psi (4.8 bar)  
ΔP @ 200°F (93°C): 20 psi (1.4 bar)  
Flow Rate: 10 gpm (38 lpm) per 10 in length

### Biological Safety/Product Purity:

Meets USP Class VI requirements for plastics  
All components FDA listed per CFR, Title 21  
Non-fiber releasing per FDA Part 210.3B (5) and (6)  
Non-photo sensitive

### Filtration Ratings:

90% at 0.25, 0.45, 0.8, 2, 3, 5, 10, 30, 50 and 100 micrometer pore sizes

### Poly-Mate™ Plus Length Factors

Length (in)	Factor
4	0.4
10	1.0
20	2.0
30	3.0
40	4.0

### Poly-Mate Plus Flow Factors (psid/gpm @ 1 cks)

Rating Flow (μm)	Factor
0.25	0.0900
0.45	0.0530
0.8	0.0290
2	0.0068
3	0.0060
5	0.0048
10	0.0040
30	0.0030
50	0.0025
100	0.0020

## Performing Attributes

### Flow Rate and Pressure Drop Formulas

$$\text{Flow Rate (gpm)} = \frac{\text{Clean DP} \times \text{Length Factor}}{\text{Viscosity} \times \text{Flow Factor}}$$

$$\text{Clean } \Delta P = \frac{\text{Flow Rate} \times \text{Viscosity} \times \text{Flow Factor}}{\text{Length Factor}}$$


### Notes:

- Clean ΔP is PSI differential at start.
- Viscosity is centistokes. Use Conversion Tables for other units.
- Flow Factor is ΔP/GPM at 1 cks for 10 in (or single).
- Length Factors convert flow or ΔP from 10 in (single length) to required cartridge length.

### Liquid Particle Retention Ratings (μm) @ Removal Efficiency of:

Parker	90%	95%	98%	99.90%	99.98%
PMP002	0.30	0.45	0.90	1.6	2.2
PMP004	0.45	0.75	1.4	2.9	3.1
PMP008	0.8	1.5	3.2	8.0	9.2
PMP020	1.7	3.1	8.6	9.5	15.0
PMP030	3.0	4.6	6.1	11.0	12.0
PMP050	5.0	8.4	10.6	12.0	14.0
PMP100	10.0	12.0	15.0	17.0	21.0
PMP300	15.0	24.0	35.0	44.0	52.0
PMP500	50.0	56.0	62.0	68.0	71.0
PMP1000	100.0	109.0	117.0	126.0	138.0

## Ordering Information

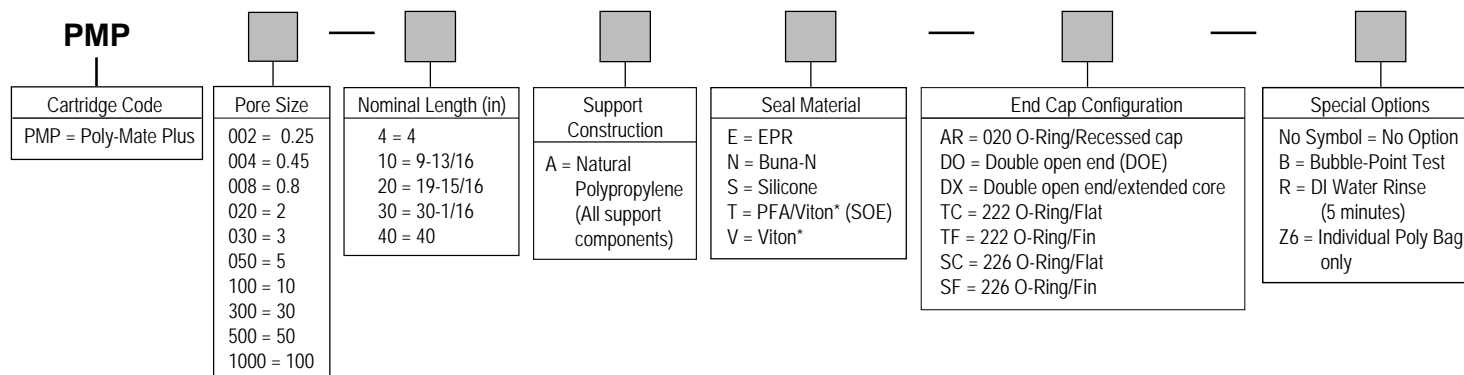

Specifications are subject to change without notification.  
\*Viton is a registered trademark of E.I. DuPont de Nemours & Co., Inc.

© 2007 Parker Hannifin  
Process Advanced Filtration Inc.  
All Rights Reserved  
SPEC-C2044-Rev. A 01/08



ENGINEERING YOUR SUCCESS.