

## Fulflo® ParMax Filter Cartridges

### Large-diameter high-flow elements

The best of pleated and large diameter technologies are combined in Parker's ParMax™ high flow filter cartridges. ParMax™ cartridges are available with polypropylene and microfiberglass media in absolute (99.98%) ratings from 1 to 90 micron. The unique layered construction provides excellent retention across a wide range of flux rates. One-six inch diameter cartridge can handle up to 500 gpm flow (60" length). The inside-to-outside flow allows for a high contaminant holding capacity. High flow and a long filter life make the ParMax™ an ideal choice for a wide variety of critical process applications.



### Benefits

- Large diameter yields much higher flow rates compared to traditional 2.5" filters
- High flow capacity permits use of fewer elements and cuts capital expenditure
- Inside-out flow pattern ensures positive capture of contaminants
- Absolute retention ratings for critical filtration

- All materials listed as acceptable for potable and edible contact according to CFR Title 21
- Manufactured with strict quality control
- Parker is an ISO9001:2000 Certified Division

### Applications

- Process water
- Water
- Spirits
- Food and beverage

# Fulflo® ParMax Filter Cartridges

## Specifications

### Materials of Construction:

- Media:  
 RCP - polypropylene  
 RMG - microfiberglass  
 Support/Drainage  
 Polypropylene  
 Hardware  
 Polypropylene  
 O-rings  
 EPR, Buna-N, Viton®, silicone

### Retention Ratings (99.98%):

- 1, 3, 4.5, 10, 20, 30, 40 and 90 µm

### Maximum Operating Conditions:

- Maximum Temperature  
 176°F (80°C) @ 30 psid (2.1 bar)

### Maximum Differential Pressure:



- 70 psi (4.8 bar) @ 77°F (25°C)  
 30 psi (2.1 bar) @ 176°F (80°C)

### Recommended Operating Conditions:


- Flow Rate  
 Up to 175 gpm (662 lpm)/20" element  
 Up to 350 gpm (1325 lpm)/40" element  
 Up to 500 gpm (1892 lpm)/60" element  
 Changeout Pressure  
 35 psid (2.41 bar)

### Dimensions (nominal):

- Outside Diameter: 6" (152mm)  
 Inside Diameter: 2.9" (74mm)

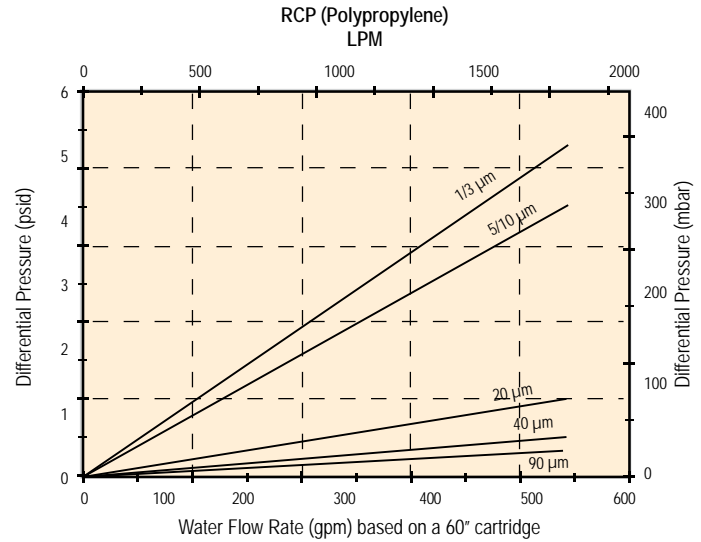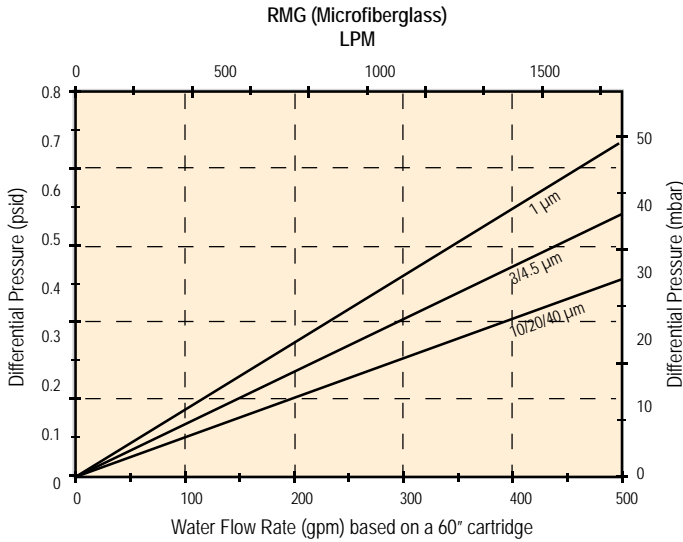

## Ordering Information

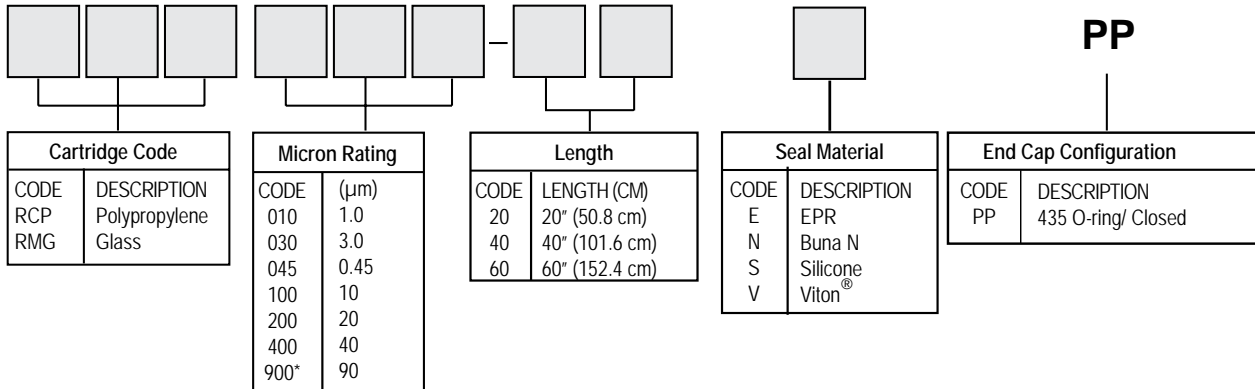

\*Available only in polypropylene media (RCP)

Specifications are subject to change without notification.  
 \*Viton is a registered trademark of E.I. DuPont de Nemours & Co., Inc.

© 2007 Parker Hannifin  
 Process Advanced Filtration Inc.  
 All Rights Reserved  
 SPEC-C2062-Rev. A 01/08



ENGINEERING YOUR SUCCESS.